

Gewindestifte DIN 913 / 914 / 915 / 916

Set screws DIN 913 / 914 / 915 / 916



Gewindestifte mit Kegelkuppe, schwarz Innensechskant nach DIN 913 / ISO 4026

Set screws with flat point, black
internal hexagon per DIN 913 / ISO 4026



Artikel-Nr.	Außengewinde	Länge	Schlüsselweite
Article-No.	External thread	Length	Key-width
16699	M2	3	0,9
16700	M2	4	0,9
16701	M2	5	0,9
16702	M2	6	0,9
16703	M2	8	0,9
16704	M2	10	0,9
16705	M2,5	3	1,3
16706	M2,5	4	1,3
16707	M2,5	5	1,3
16708	M2,5	6	1,3
16709	M2,5	8	1,3
16710	M2,5	10	1,3
67368	M2,5	12	1,3
221	M3	3	1,5
16711	M3	4	1,5
222	M3	5	1,5
224	M3	6	1,5
16712	M3	8	1,5
215	M3	10	1,5
217	M3	12	1,5
219	M3	16	1,5
16713	M3	20	1,5
67381	M3	25	1,5
16714	M4	3	2,0
234	M4	4	2,0
236	M4	5	2,0
238	M4	6	2,0
240	M4	8	2,0
16718	M4	10	2,0
228	M4	12	2,0
230	M4	16	2,0
232	M4	20	2,0
233	M4	25	2,0
16719	M4	30	2,0
16720	M4	35	2,0

Artikel-Nr.	Außengewinde	Länge	Schlüsselweite
Article-No.	External thread	Length	Key-width
16721	M4	40	2,0
16723	M5	3	2,5
249	M5	4	2,5
250	M5	5	2,5
16724	M5	6	2,5
251	M5	8	2,5
16727	M5	10	2,5
16729	M5	12	2,5
16731	M5	16	2,5
16734	M5	20	2,5
244	M5	25	2,5
246	M5	30	2,5
248	M5	35	2,5
16738	M5	40	2,5
16739	M5	45	2,5
16740	M5	50	2,5
16742	M6	4	3,0
16743	M6	5	3,0
263	M6	6	3,0
265	M6	0,8	3,0
253	M6	10	3,0
255	M6	12	3,0
16753	M6	16	3,0
258	M6	20	3,0
16758	M6	25	3,0
16759	M6	30	3,0
261	M6	35	3,0
16760	M6	40	3,0
16761	M6	45	3,0
16762	M6	50	3,0
16763	M6	55	3,0
16764	M6	60	3,0
280	M8	6	4,0
281	M8	8	4,0
16771	M8	10	4,0

Gewindestifte mit Kegelkuppe, schwarz Innensechskant nach DIN 913 / ISO 4026

Set screws with flat point, black
internal hexagon per DIN 913 / ISO 4026



Artikel-Nr.	Außengewinde	Länge	Schlüsselweite
Article-No.	External thread	Length	Key-width
268	M8	12	4,0
270	M8	16	4,0
272	M8	20	4,0
274	M8	25	4,0
276	M8	30	4,0
16788	M8	35	4,0
277	M8	40	4,0
16791	M8	45	4,0
16792	M8	50	4,0
16794	M8	55	4,0
279	M8	60	4,0
67402	M8	65	4,0
16796	M8	70	4,0
67326	M10	6	5,0
16803	M10	8	5,0
16806	M10	10	5,0
16809	M10	12	5,0
177	M10	16	5,0
179	M10	20	5,0
181	M10	25	5,0
183	M10	30	5,0
185	M10	35	5,0
187	M10	40	5,0
189	M10	45	5,0
191	M10	50	5,0
16828	M10	55	5,0
16829	M10	60	5,0
67324	M10	65	5,0
16832	M10	70	5,0
16836	M12	8	6,0
16838	M12	10	6,0
192	M12	12	6,0
194	M12	16	6,0
196	M12	20	6,0
197	M12	25	6,0

Artikel-Nr.	Außengewinde	Länge	Schlüsselweite
Article-No.	External thread	Length	Key-width
198	M12	30	6,0
199	M12	35	6,0
200	M12	40	6,0
16860	M12	45	6,0
202	M12	50	6,0
204	M12	55	6,0
16865	M12	60	6,0
67333	M12	65	6,0
16867	M12	70	6,0
67552	M14	10	6,0
67337	M14	12	6,0
16876	M14	14	6,0
16877	M14	16	6,0
16880	M14	20	6,0
67341	M14	25	6,0
16884	M14	30	6,0
67343	M14	35	6,0
16887	M14	40	6,0
67346	M14	45	6,0
16890	M14	50	6,0
16893	M16	12	8,0
67354	M16	14	8,0
206	M16	16	8,0
207	M16	20	8,0
208	M16	25	8,0
209	M16	30	8,0
210	M16	35	8,0
211	M16	40	8,0
212	M16	45	8,0
213	M16	50	8,0
16905	M16	55	8,0
214	M16	60	8,0
67357	M16	65	8,0
16907	M16	70	8,0

Gewindestifte mit Kegelkuppe, verzinkt weiß Innensechskant nach DIN 913 / ISO 4026

Set screws with flat point, galvanized
white internal hexagon per DIN 913 / ISO 4026



Artikel-Nr.	Außengewinde	Länge	Schlüsselweite
Article-No.	External thread	Length	Key-width
67366	M2	3	0,9
16953	M2	4	0,9
67375	M2	5	0,9
16954	M2	6	0,9
16955	M2	8	0,9
16956	M2	10	0,9
67370	M2,5	3	1,3
67371	M2,5	4	1,3
67372	M2,5	5	1,3
67373	M2,5	6	1,3
67374	M2,5	8	1,3
67367	M2,5	10	1,3
67369	M2,5	12	1,3
16957	M3	3	1,5
16958	M3	4	1,5
223	M3	5	1,5
225	M3	6	1,5
226	M3	8	1,5
216	M3	10	1,5
218	M3	12	1,5
16959	M3	16	1,5
220	M3	20	1,5
67382	M3	25	1,5
67387	M4	3	2,0
235	M4	4	2,0
237	M4	5	2,0
239	M4	6	2,0
16960	M4	8	2,0
227	M4	10	2,0
229	M4	12	2,0
231	M4	16	2,0
16963	M4	20	2,0
16964	M4	25	2,0
16965	M4	30	2,0
16966	M4	35	2,0

Artikel-Nr.	Außengewinde	Länge	Schlüsselweite
Article-No.	External thread	Length	Key-width
16967	M4	40	2,0
67391	M5	3	2,5
16968	M5	4	2,5
16969	M5	5	2,5
16970	M5	6	2,5
252	M5	8	2,5
241	M5	10	2,5
16971	M5	12	2,5
242	M5	16	2,5
243	M5	20	2,5
245	M5	25	2,5
247	M5	30	2,5
16973	M5	35	2,5
16974	M5	40	2,5
67392	M5	45	2,5
67622	M5	50	2,5
16975	M6	4	3,0
16976	M6	5	3,0
264	M6	6	3,0
266	M6	0,8	3,0
254	M6	10	3,0
256	M6	12	3,0
257	M6	16	3,0
259	M6	20	3,0
16979	M6	25	3,0
260	M6	30	3,0
262	M6	35	3,0
16980	M6	40	3,0
16981	M6	45	3,0
16982	M6	50	3,0
67393	M6	55	3,0
16983	M6	60	3,0
16984	M8	6	4,0
16985	M8	8	4,0
267	M8	10	4,0

Gewindestifte mit Kegelkuppe, verzinkt weiß Innensechskant nach DIN 913 / ISO 4026

Set screws with flat point, galvanized
white internal hexagon per DIN 913 / ISO 4026



Artikel-Nr.	Außengewinde	Länge	Schlüsselweite
Article-No.	External thread	Length	Key-width
269	M8	12	4,0
271	M8	16	4,0
273	M8	20	4,0
275	M8	25	4,0
16988	M8	30	4,0
16989	M8	35	4,0
16990	M8	40	4,0
278	M8	45	4,0
16991	M8	50	4,0
16992	M8	55	4,0
16993	M8	60	4,0
67403	M8	65	4,0
16994	M8	70	4,0
67327	M10	6	5,0
16999	M10	8	5,0
175	M10	10	5,0
176	M10	12	5,0
178	M10	16	5,0
180	M10	20	5,0
182	M10	25	5,0
184	M10	30	5,0
186	M10	35	5,0
188	M10	40	5,0
190	M10	45	5,0
17000	M10	50	5,0
67323	M10	55	5,0
17001	M10	60	5,0
67325	M10	65	5,0
17002	M10	70	5,0
67335	M12	8	6,0
17006	M12	10	6,0
193	M12	12	6,0
195	M12	16	6,0
17008	M12	20	6,0
17009	M12	25	6,0

Artikel-Nr.	Außengewinde	Länge	Schlüsselweite
Article-No.	External thread	Length	Key-width
17010	M12	30	6,0
17011	M12	35	6,0
201	M12	40	6,0
17012	M12	45	6,0
203	M12	50	6,0
17013	M12	55	6,0
205	M12	60	6,0
67334	M12	65	6,0
17014	M12	70	6,0
67336	M14	10	6,0
67338	M14	12	6,0
67623	M14	14	6,0
67339	M14	16	6,0
17018	M14	20	6,0
67499	M14	25	6,0
67342	M14	30	6,0
67344	M14	35	6,0
67345	M14	40	6,0
67347	M14	45	6,0
17019	M14	50	6,0
67352	M16	12	8,0
67355	M16	14	8,0
17021	M16	16	8,0
17022	M16	20	8,0
17023	M16	25	8,0
17024	M16	30	8,0
17025	M16	35	8,0
17026	M16	40	8,0
17027	M16	45	8,0
17028	M16	50	8,0
17029	M16	55	8,0
17030	M16	60	8,0
67358	M16	65	8,0
17031	M16	70	8,0

Gewindestifte mit Spitze, schwarz Innensechskant nach DIN 914 / ISO 4027

Set screws with cone point, black
internal hexagon per DIN 914 / ISO 4027



Artikel-Nr.	Außengewinde	Länge	Schlüsselweite
Article-No.	External thread	Length	Key-width
67296	M2	3	0,9
17296	M2	4	0,9
17297	M2	5	0,9
17298	M2	6	0,9
17299	M2	8	0,9
17300	M2	10	0,9
17301	M2,5	3	1,3
17302	M2,5	4	1,3
17303	M2,5	5	1,3
17304	M2,5	6	1,3
17305	M2,5	8	1,3
17306	M2,5	10	1,3
67300	M2,5	12	1,3
316	M3	3	1,5
317	M3	4	1,5
318	M3	5	1,5
319	M3	6	1,5
320	M3	8	1,5
314	M3	10	1,5
315	M3	12	1,5
327	M4	4	2,0
328	M4	5	2,0
330	M4	6	2,0
332	M4	8	2,0
321	M4	10	2,0
323	M4	12	2,0
325	M4	16	2,0
17312	M4	20	2,0
326	M4	25	2,0
17313	M4	30	2,0
17314	M4	35	2,0
339	M5	4	2,5
340	M5	5	2,5
342	M5	6	2,5
344	M5	8	2,5

Artikel-Nr.	Außengewinde	Länge	Schlüsselweite
Article-No.	External thread	Length	Key-width
333	M5	10	2,5
334	M5	12	2,5
336	M5	16	2,5
337	M5	20	2,5
17317	M5	25	2,5
17318	M5	30	2,5
17319	M5	35	2,5
17320	M5	40	2,5
17321	M6	5	3,0
353	M6	6	3,0
355	M6	8	3,0
345	M6	10	3,0
347	M6	12	3,0
17322	M6	16	3,0
17324	M6	20	3,0
350	M6	25	3,0
352	M6	30	3,0
17325	M6	35	3,0
17326	M6	40	3,0
17327	M6	45	3,0
17328	M6	50	3,0
17330	M8	6	4,0
368	M8	8	4,0
357	M8	10	4,0
359	M8	12	4,0
361	M8	16	4,0
17332	M8	20	4,0
362	M8	25	4,0
364	M8	30	4,0
17333	M8	35	4,0
366	M8	40	4,0
17334	M8	45	4,0
367	M8	50	4,0
17335	M8	55	4,0
17339	M10	8	5,0

Gewindestifte mit Spitze, schwarz Innensechskant nach DIN 914 / ISO 4027

Set screws with cone point, black
internal hexagon per DIN 914 / ISO 4027



Artikel-Nr.	Außengewinde	Länge	Schlüsselweite
Article-No.	External thread	Length	Key-width
282	M10	10	5,0
284	M10	12	5,0
285	M10	16	5,0
286	M10	20	5,0
288	M10	25	5,0
290	M10	30	5,0
291	M10	35	5,0
17341	M10	40	5,0
293	M10	45	5,0
294	M10	50	5,0
67269	M10	55	5,0
17342	M10	60	5,0
67272	M10	65	5,0
17346	M12	10	6,0
295	M12	12	6,0
297	M12	16	6,0
299	M12	20	6,0
301	M12	25	6,0
303	M12	30	6,0
305	M12	35	6,0
306	M12	40	6,0
307	M12	45	6,0
309	M12	50	6,0
17347	M12	55	6,0
310	M12	60	6,0
67275	M12	65	6,0
17348	M12	70	6,0
67278	M14	14	6,0
67280	M14	16	6,0
17350	M14	20	6,0
67283	M14	25	6,0
17351	M14	30	6,0
67285	M14	35	6,0
17352	M14	40	6,0
67288	M14	45	6,0

Artikel-Nr.	Außengewinde	Länge	Schlüsselweite
Article-No.	External thread	Length	Key-width
67290	M14	50	6,0
17353	M16	16	8,0
17354	M16	20	8,0
311	M16	25	8,0
312	M16	30	8,0
17355	M16	35	8,0
313	M16	40	8,0
17356	M16	45	8,0
17357	M16	50	8,0

Gewindestifte mit Spitze, verzinkt, weiß Innensechskant nach DIN 914 / ISO 4027

Set screws with cone point, galvanized, white
internal hexagon per DIN 914 / ISO 4027



Artikel-Nr.	Außengewinde	Länge	Schlüsselweite
Article-No.	External thread	Length	Key-width
67297	M2	3	0,9
67298	M2	4	0,9
67307	M2	5	0,9
67308	M2	6	0,9
67309	M2	8	0,9
67295	M2	10	0,9
67302	M2,5	3	1,3
67303	M2,5	4	1,3
67304	M2,5	5	1,3
67305	M2,5	6	1,3
67306	M2,5	8	1,3
67299	M2,5	10	1,3
67301	M2,5	12	1,3
17384	M3	3	1,5
17385	M3	4	1,5
17386	M3	5	1,5
17387	M3	6	1,5
17388	M3	8	1,5
17389	M3	10	1,5
17390	M3	12	1,5
17392	M4	4	2,0
329	M4	5	2,0
331	M4	6	2,0
17393	M4	8	2,0
322	M4	10	2,0
324	M4	12	2,0
17394	M4	16	2,0
17396	M4	20	2,0
17397	M4	25	2,0
17398	M4	30	2,0
17399	M4	35	2,0
17400	M5	4	2,5
341	M5	5	2,5
343	M5	6	2,5
17401	M5	8	2,5

Artikel-Nr.	Außengewinde	Länge	Schlüsselweite
Article-No.	External thread	Length	Key-width
17402	M5	10	2,5
335	M5	12	2,5
17403	M5	16	2,5
338	M5	20	2,5
17404	M5	25	2,5
17405	M5	30	2,5
67311	M5	35	2,5
67312	M5	40	2,5
17406	M6	5	3,0
354	M6	6	3,0
356	M6	8	3,0
346	M6	10	3,0
348	M6	12	3,0
349	M6	16	3,0
17408	M6	20	3,0
351	M6	25	3,0
17409	M6	30	3,0
67316	M6	35	3,0
17410	M6	40	3,0
17411	M6	45	3,0
67318	M6	50	3,0
67322	M8	6	4,0
369	M8	8	4,0
358	M8	10	4,0
360	M8	12	4,0
17412	M8	16	4,0
17413	M8	20	4,0
363	M8	25	4,0
17414	M8	30	4,0
365	M8	35	4,0
17415	M8	40	4,0
17416	M8	45	4,0
17417	M8	50	4,0
67321	M8	55	4,0
67274	M10	8	5,0

Gewindestifte mit Spitze, verzinkt, weiß Innensechskant nach DIN 914 / ISO 4027

Set screws with cone point, galvanized, white
internal hexagon per DIN 914 / ISO 4027



Artikel-Nr.	Außengewinde	Länge	Schlüsselweite
Article-No.	External thread	Length	Key-width
283	M10	10	5,0
17419	M10	12	5,0
17420	M10	16	5,0
287	M10	20	5,0
289	M10	25	5,0
17421	M10	30	5,0
17422	M10	35	5,0
292	M10	40	5,0
17423	M10	45	5,0
17424	M10	50	5,0
67270	M10	55	5,0
67271	M10	60	5,0
67273	M10	65	5,0
17425	M12	10	6,0
296	M12	12	6,0
298	M12	16	6,0
300	M12	20	6,0
302	M12	25	6,0
304	M12	30	6,0
17426	M12	35	6,0
17427	M12	40	6,0
308	M12	45	6,0
17428	M12	50	6,0
17429	M12	55	6,0
17430	M12	60	6,0
67276	M12	65	6,0
67277	M12	70	6,0
67279	M14	14	6,0
67281	M14	16	6,0
67282	M14	20	6,0
67624	M14	25	6,0
67284	M14	30	6,0
67286	M14	35	6,0
67287	M14	40	6,0
67289	M14	45	6,0

Artikel-Nr.	Außengewinde	Länge	Schlüsselweite
Article-No.	External thread	Length	Key-width
67291	M14	50	6,0
17432	M16	16	8,0
17433	M16	20	8,0
17434	M16	25	8,0
17435	M16	30	8,0
17436	M16	35	8,0
17437	M16	40	8,0
17438	M16	45	8,0
17439	M16	50	8,0

Gewindestifte mit Zapfen, schwarz Innensechskant nach DIN 915 / ISO 4028

Set screws with dog point, black
internal hexagon per DIN 915 / ISO 4028



Artikel-Nr.	Außengewinde	Länge	Schlüsselweite
Article-No.	External thread	Length	Key-width
17634	M3	3	1,5
17635	M3	4	1,5
17636	M3	5	1,5
17637	M3	6	1,5
17638	M3	8	1,5
17639	M3	10	1,5
17640	M3	12	1,5
17641	M3	16	1,5
17642	M3	20	1,5
17643	M4	4	2,0
17644	M4	5	2,0
17645	M4	6	2,0
17646	M4	8	2,0
17647	M4	10	2,0
17648	M4	12	2,0
17649	M4	16	2,0
17650	M4	20	2,0
17651	M4	25	2,0
17652	M4	30	2,0
17653	M4	35	2,0
17654	M4	40	2,0
17655	M5	4	2,5
17656	M5	5	2,5
17657	M5	6	2,5
17658	M5	8	2,5
17659	M5	10	2,5
17660	M5	12	2,5
17661	M5	16	2,5
17663	M5	20	2,5
17664	M5	25	2,5
17665	M5	30	2,5
17666	M5	35	2,5
17667	M5	40	2,5
17668	M5	50	2,5
17669	M6	5	3,0

Artikel-Nr.	Außengewinde	Länge	Schlüsselweite
Article-No.	External thread	Length	Key-width
17670	M6	6	3,0
17671	M6	0,8	3,0
17672	M6	10	3,0
17673	M6	12	3,0
17674	M6	16	3,0
17676	M6	20	3,0
17677	M6	25	3,0
17678	M6	30	3,0
17679	M6	35	3,0
17680	M6	40	3,0
17681	M6	45	3,0
17682	M6	50	3,0
17683	M6	60	3,0
17684	M8	6	4,0
17685	M8	8	4,0
17686	M8	10	4,0
17687	M8	12	4,0
17688	M8	16	4,0
17690	M8	20	4,0
17691	M8	25	4,0
17692	M8	30	4,0
17693	M8	35	4,0
17694	M8	40	4,0
17695	M8	45	4,0
17696	M8	50	4,0
17697	M8	55	4,0
17698	M8	60	4,0
17699	M8	70	4,0
17701	M10	8	5,0
17702	M10	10	5,0
17703	M10	12	5,0
17704	M10	16	5,0
17706	M10	20	5,0
17707	M10	25	5,0
17708	M10	30	5,0

Gewindestifte mit Zapfen schwarz Innensechskant nach DIN 915 / ISO 4028

Set screws with dog point, black
internal hexagon per DIN 915 / ISO 4028



Artikel-Nr.	Außengewinde	Länge	Schlüsselweite
Article-No.	External thread	Length	Key-width
17709	M10	35	5,0
17710	M10	40	5,0
17711	M10	45	5,0
17712	M10	50	5,0
17713	M10	55	5,0
17714	M10	60	5,0
17715	M10	70	5,0
17718	M12	10	6,0
17719	M12	12	6,0
17720	M12	16	6,0
17722	M12	20	6,0
17723	M12	25	6,0
17724	M12	30	6,0
17725	M12	35	6,0
17726	M12	40	6,0
17727	M12	45	6,0
17728	M12	50	6,0
17729	M12	55	6,0
17730	M12	60	6,0
17731	M12	70	6,0
17733	M14	20	6,0
17734	M14	30	6,0
17735	M14	40	6,0
17736	M16	16	8,0
17737	M16	20	8,0
17738	M16	25	8,0
17739	M16	30	8,0
17740	M16	35	8,0
17741	M16	40	8,0
17742	M16	45	8,0
17743	M16	50	8,0
17744	M16	55	8,0
17745	M16	60	8,0
17746	M16	70	8,0

Gewindestifte mit Zapfen, verzinkt, weiß Innensechskant nach DIN 915 / ISO 4028

Set screws with dog point, galvanized, white
internal hexagon per DIN 915 / ISO 4028



Artikel-Nr.	Außengewinde	Länge	Schlüsselweite
Article-No.	External thread	Length	Key-width
17772	M3	4	1,5
17773	M3	5	1,5
17774	M3	6	1,5
17775	M3	8	1,5
17776	M3	10	1,5
17777	M3	12	1,5
17778	M3	16	1,5
17779	M3	20	1,5
17780	M4	4	2,0
17781	M4	5	2,0
17782	M4	6	2,0
17783	M4	8	2,0
17784	M4	10	2,0
17785	M4	12	2,0
17786	M4	16	2,0
17787	M4	20	2,0
17788	M4	25	2,0
17789	M4	30	2,0
17790	M5	5	2,5
17791	M5	6	2,5
17792	M5	8	2,5
17793	M5	10	2,5
17794	M5	12	2,5
17795	M5	16	2,5
17796	M5	20	2,5
17797	M5	25	2,5
17798	M5	30	2,5
67540	M5	40	2,5
17799	M6	6	3,0
17800	M6	0,8	3,0
17801	M6	10	3,0
17802	M6	12	3,0
17803	M6	16	3,0
17804	M6	20	3,0
17805	M6	25	3,0

Artikel-Nr.	Außengewinde	Länge	Schlüsselweite
Article-No.	External thread	Length	Key-width
17806	M6	30	3,0
17807	M6	35	3,0
17808	M6	40	3,0
17809	M6	45	3,0
17810	M6	50	3,0
17811	M8	8	4,0
17812	M8	10	4,0
17813	M8	12	4,0
17814	M8	16	4,0
17815	M8	20	4,0
17816	M8	25	4,0
17817	M8	30	4,0
17818	M8	35	4,0
17819	M8	40	4,0
17820	M8	50	4,0
17821	M10	8	5,0
17822	M10	10	5,0
17823	M10	12	5,0
17824	M10	16	5,0
17825	M10	20	5,0
17826	M10	25	5,0
17827	M10	30	5,0
17828	M10	35	5,0
17829	M10	40	5,0
17830	M10	45	5,0
17831	M10	50	5,0
17832	M10	55	5,0
17833	M10	60	5,0
17834	M12	12	5,0
17835	M12	16	5,0
17836	M12	20	5,0
17837	M12	25	5,0
17838	M12	30	5,0
17839	M12	35	5,0
17840	M12	40	5,0

Gewindestifte mit Zapfen, verzinkt, weiß Innensechskant nach DIN 915 / ISO 4028


Set screws with dog point, galvanized, white
internal hexagon per DIN 915 / ISO 4028



Artikel-Nr.	Außengewinde	Länge	Schlüsselweite
Article-No.	External thread	Length	Key-width
17841	M12	45	6,0
17842	M12	50	6,0
17843	M12	55	6,0
17844	M12	60	6,0
17845	M12	70	6,0
17848	M16	16	6,0
17849	M16	20	8,0
17850	M16	25	8,0
17851	M16	30	8,0
17852	M16	35	8,0
17853	M16	40	8,0
17854	M16	45	8,0
17855	M16	50	8,0
17856	M16	55	8,0
17857	M16	60	8,0
17858	M16	70	8,0

Gewindestifte mit Ringschneide, schwarz Innensechskant nach DIN 916 / ISO 4029

Set screws with cup point, black
internal hexagon per DIN 916 / ISO 4029

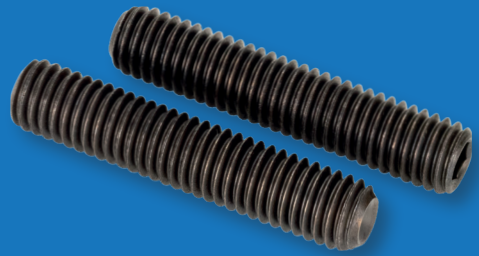


Artikel-Nr.	Außengewinde	Länge	Schlüsselweite
Article-No.	External thread	Length	Key-width
18011	M2	3	0,9
18012	M2	4	0,9
18013	M2	5	0,9
18014	M2	6	0,9
18015	M2,5	3	1,3
18016	M2,5	4	1,3
18017	M2,5	5	1,3
18018	M2,5	6	1,3
18019	M2,5	10	1,3
18020	M3	3	1,5
18021	M3	4	1,5
18022	M3	5	1,5
18023	M3	6	1,5
18024	M3	8	1,5
18025	M3	10	1,5
18026	M3	12	1,5
18027	M3	16	1,5
18028	M3	20	1,5
18029	M4	4	2,0
18030	M4	5	2,0
18031	M4	6	2,0
18032	M4	8	2,0
18033	M4	10	2,0
18034	M4	12	2,0
18035	M4	16	2,0
18036	M4	20	2,0
18037	M4	25	2,0
18038	M4	30	2,0
18039	M4	40	2,0
18040	M5	4	2,5
18041	M5	5	2,5
18042	M5	6	2,5
18043	M5	8	2,5
18044	M5	10	2,5
18045	M5	12	2,5

Artikel-Nr.	Außengewinde	Länge	Schlüsselweite
Article-No.	External thread	Length	Key-width
18046	M5	16	2,5
18048	M5	20	2,5
18049	M5	25	2,5
18050	M5	30	2,5
18051	M5	35	2,5
18052	M5	40	2,5
18053	M6	5	3,0
18054	M6	6	3,0
18056	M6	0,8	3,0
18058	M6	10	3,0
18060	M6	12	3,0
18062	M6	16	3,0
18065	M6	20	3,0
18067	M6	25	3,0
18068	M6	30	3,0
18069	M6	35	3,0
18070	M6	40	3,0
18071	M6	45	3,0
18072	M6	50	3,0
18073	M8	6	4,0
18075	M8	8	4,0
18077	M8	10	4,0
18079	M8	12	4,0
18081	M8	16	4,0
18084	M8	20	4,0
18086	M8	25	4,0
18088	M8	30	4,0
18090	M8	35	4,0
18091	M8	40	4,0
18093	M8	45	4,0
18094	M8	50	4,0
18096	M8	55	4,0
18097	M8	60	4,0
18098	M8	70	4,0
18100	M10	8	5,0

Gewindestifte mit Ringschneide, schwarz Innensechskant nach DIN 916 / ISO 4029

Set screws with cup point, black
internal hexagon per DIN 916 / ISO 4029

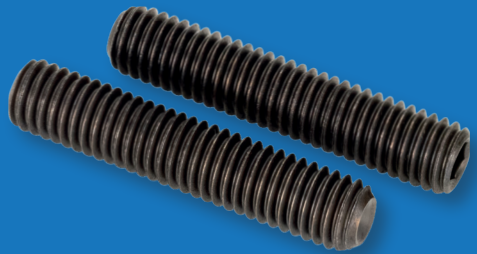

Artikel-Nr.	Außengewinde	Länge	Schlüsselweite
Article-No.	External thread	Length	Key-width
18103	M10	10	5,0
18106	M10	12	5,0
18109	M10	16	5,0
18112	M10	20	5,0
18115	M10	25	5,0
18118	M10	30	5,0
18121	M10	35	5,0
18122	M10	40	5,0
18123	M10	45	5,0
18124	M10	50	5,0
18125	M10	60	5,0
18126	M10	70	5,0
18128	M12	10	6,0
18131	M12	12	6,0
18135	M12	16	6,0
18138	M12	20	6,0
18141	M12	25	6,0
18144	M12	30	6,0
18146	M12	35	6,0
18147	M12	40	6,0
18148	M12	45	6,0
18149	M12	50	6,0
18150	M12	55	6,0
18151	M12	60	6,0
18152	M12	70	6,0
18154	M14	20	6,0
18155	M14	30	6,0
18156	M14	40	6,0
18157	M14	50	6,0
18158	M16	16	8,0
18160	M16	20	8,0
18162	M16	25	8,0
18164	M16	30	8,0
18166	M16	35	8,0
18167	M16	40	8,0

Artikel-Nr.	Außengewinde	Länge	Schlüsselweite
Article-No.	External thread	Length	Key-width
18169	M16	45	8,0
18170	M16	50	8,0
18171	M16	55	8,0
18172	M16	60	8,0
18173	M16	70	8,0

Gewindestifte mit Ringschneide, verzinkt, weiß Innensechskant nach DIN 916 / ISO 4029

Set screws with cup point, galvanized, white
internal hexagon per DIN 916 / ISO 4029



Artikel-Nr.	Außengewinde	Länge	Schlüsselweite
Article-No.	External thread	Length	Key-width
18199	M3	3	1,5
18200	M3	4	1,5
18201	M3	5	1,5
18202	M3	6	1,5
18203	M3	8	1,5
18204	M3	10	1,5
18205	M3	12	1,5
18206	M3	16	1,5
18207	M3	20	1,5
18208	M4	4	2,0
18209	M4	5	2,0
18210	M4	6	2,0
18211	M4	8	2,0
18212	M4	10	2,0
18213	M4	12	2,0
18214	M4	16	2,0
18215	M4	20	2,0
18216	M5	5	2,5
18217	M5	6	2,5
18218	M5	8	2,5
18219	M5	10	2,5
18220	M5	12	2,5
18221	M5	16	2,5
18222	M5	20	2,5
18223	M5	25	2,5
18224	M5	30	2,5
18225	M5	40	2,5
18226	M6	5	3,0
18227	M6	6	3,0
18228	M6	0,8	3,0
18229	M6	10	3,0
18230	M6	12	3,0
18231	M6	16	3,0
18232	M6	20	3,0
18233	M6	25	3,0

Artikel-Nr.	Außengewinde	Länge	Schlüsselweite
Article-No.	External thread	Length	Key-width
18234	M6	30	3,0
18235	M6	35	3,0
18236	M6	40	3,0
18237	M6	45	3,0
18238	M6	50	3,0
18239	M8	6	4,0
18240	M8	8	4,0
18241	M8	10	4,0
18242	M8	12	4,0
18243	M8	16	4,0
18244	M8	20	4,0
18245	M8	25	4,0
18246	M8	30	4,0
18247	M8	35	4,0
18248	M8	40	4,0
18249	M8	45	4,0
18250	M8	50	4,0
18251	M8	60	4,0
18252	M10	8	5,0
18253	M10	10	5,0
18254	M10	12	5,0
18256	M10	16	5,0
18257	M10	20	5,0
18258	M10	25	5,0
18259	M10	30	5,0
18260	M10	35	5,0
18261	M10	40	5,0
18262	M10	45	5,0
18263	M10	50	5,0
18264	M10	60	5,0
18265	M10	70	5,0
18267	M12	10	6,0
18268	M12	12	6,0
18269	M12	16	6,0
18270	M12	20	6,0

Gewindestifte mit Ringschneide, verzinkt, weiß Innensechskant nach DIN 916 / ISO 4029

Set screws with cup point, galvanized, white
internal hexagon per DIN 916 / ISO 4029



Artikel-Nr.	Außengewinde	Länge	Schlüsselweite
Article-No.	External thread	Length	Key-width
18271	M12	25	6,0
18272	M12	30	6,0
18273	M12	35	6,0
18274	M12	40	6,0
18275	M12	45	6,0
18276	M12	50	6,0
18277	M12	55	6,0
18278	M12	60	6,0
18279	M16	16	8,0
18280	M16	20	8,0
18281	M16	25	8,0
18282	M16	30	8,0
18283	M16	35	8,0
18284	M16	40	8,0
18285	M16	50	8,0
18286	M16	60	8,0
18287	M16	70	8,0